

TÜV

3

2026 3

TÜV NORD

3 Tiger Neo 3.0

50%

N TOPCon

IEC 61215-2:2021 MQT 06.1

STC

1000W/m²

AM1.5

25°C

A+A+A+

| | | Pmax |
|---|-----------------|-------|
| 1 | BC | 650+W |
| 2 | | 630+W |
| 3 | 3 Tiger Neo 3.0 | 650+W |


Tiger Neo

1


Tiger Neo 3.0

| | BC | | Tiger Neo 3.0 |
|---|---------|---------|---------------|
| 1 | -34.14% | -34.42% | -17.50% |
| 2 | -47.27% | -48.63% | -24.32% |

3

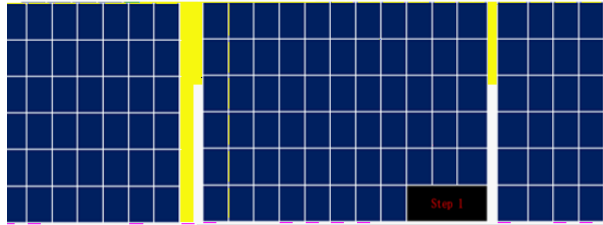


Sample # f-front-10

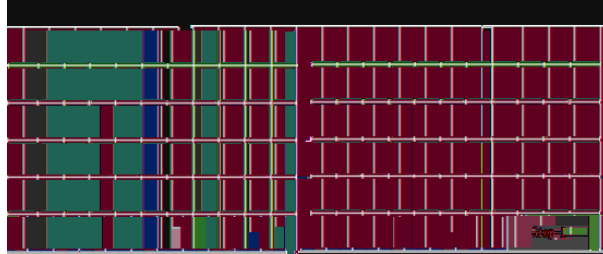


Sample #


Sample #

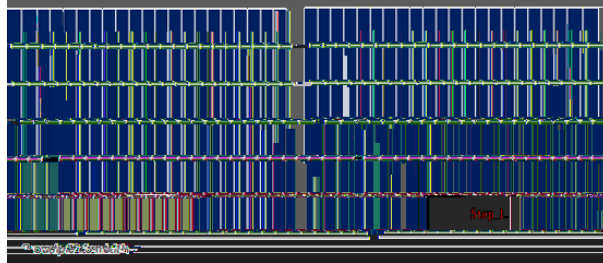

Sample #

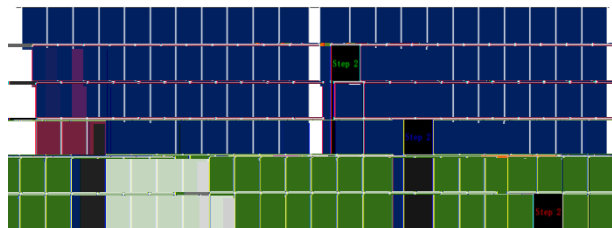


Sample #

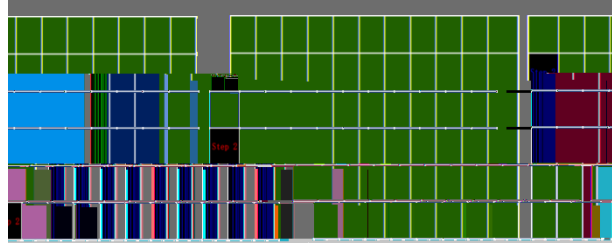

Sample #


Sample #

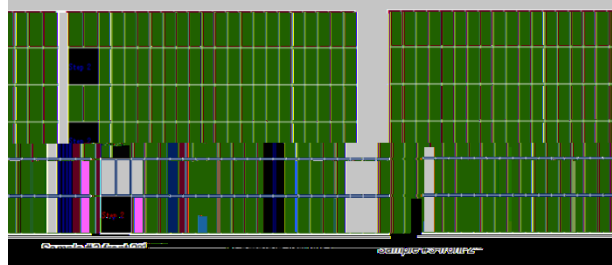

Sample #

Sample #

Neo 3.0 17.50% BC 49.3% 34% Tiger

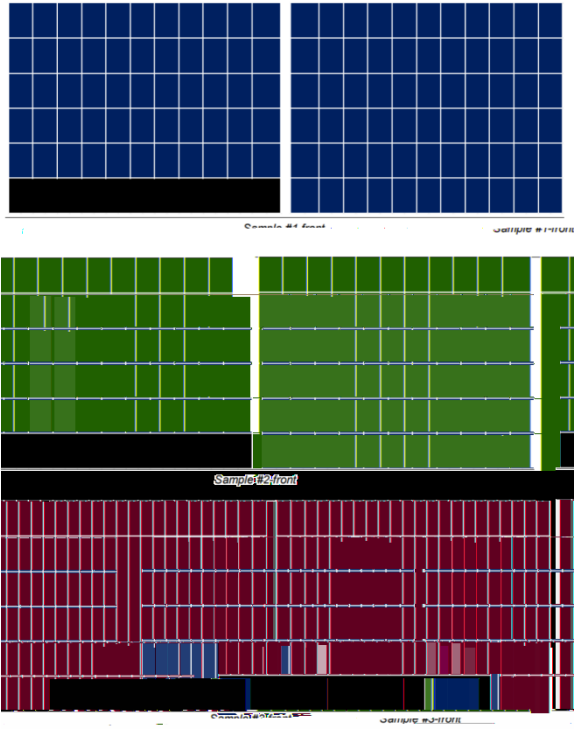






Tiger Neo 3.0 BC 17.5% BC 48.8% 34% 16.7%

3 25%

25% 100%


| | BC | | Tiger Neo 3.0 |
|------|--------|--------|---------------|
| 25% | -13.8% | -15.2% | -7.2% |
| 50% | -34.2% | -34.4% | -17.7% |
| 75% | -34.3% | -34.5% | -30.1% |
| 100% | -34.3% | -34.5% | -34.6% |


25% 25%-75% Tiger Neo 3.0 7.2% BC
50% 75%

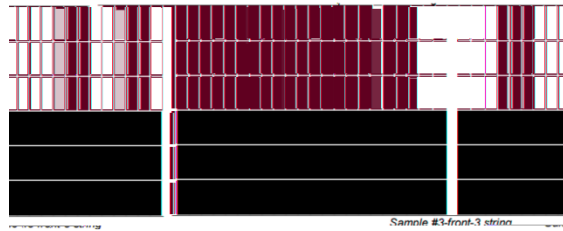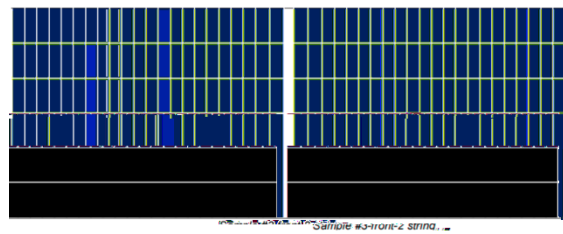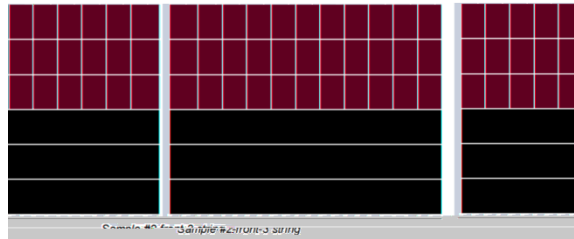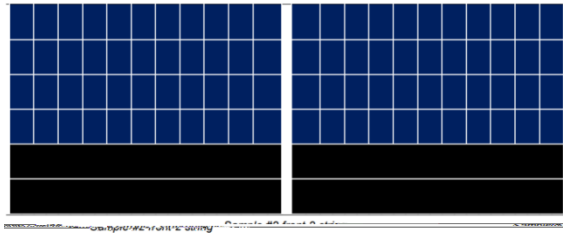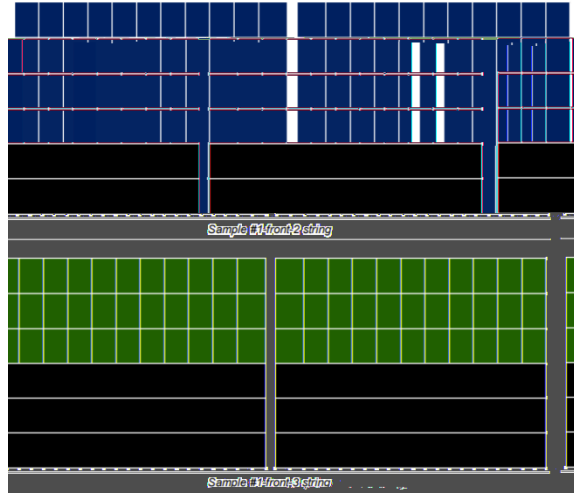

| | | | | | |
|----|-----|--------|--------|---------------|--------|
| BC | BC | -68.4% | -68.7% | Tiger Neo 3.0 | -63.5% |
| BC | 4.9 | | | 15.5% | |

| | BC | | Tiger Neo 3.0 |
|------|--------|--------|---------------|
| 25% | -50.2% | -50.1% | -50.1% |
| 50% | -49.9% | -50.1% | -50.1% |
| 75% | -49.8% | -49.9% | -49.8% |
| 100% | -49.1% | -49.4% | -49.4% |

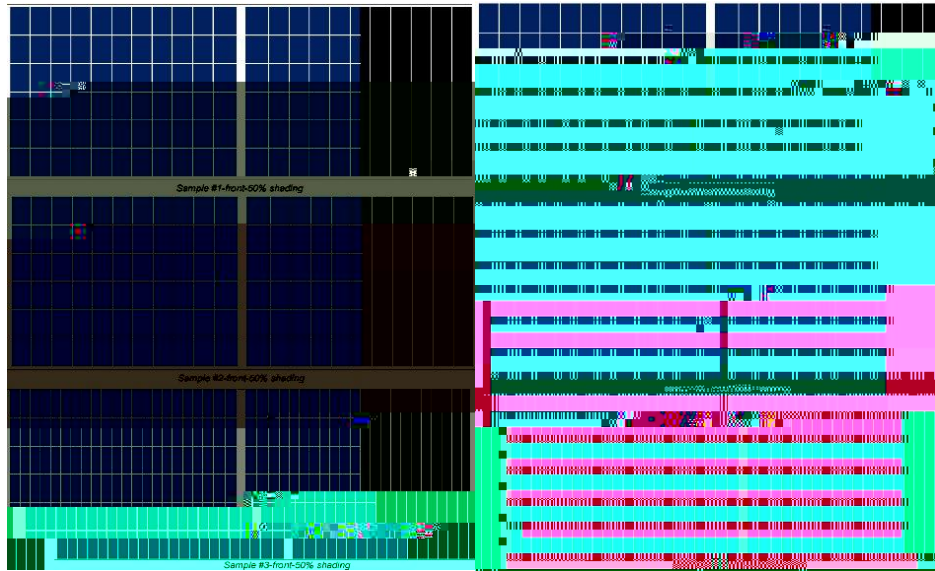

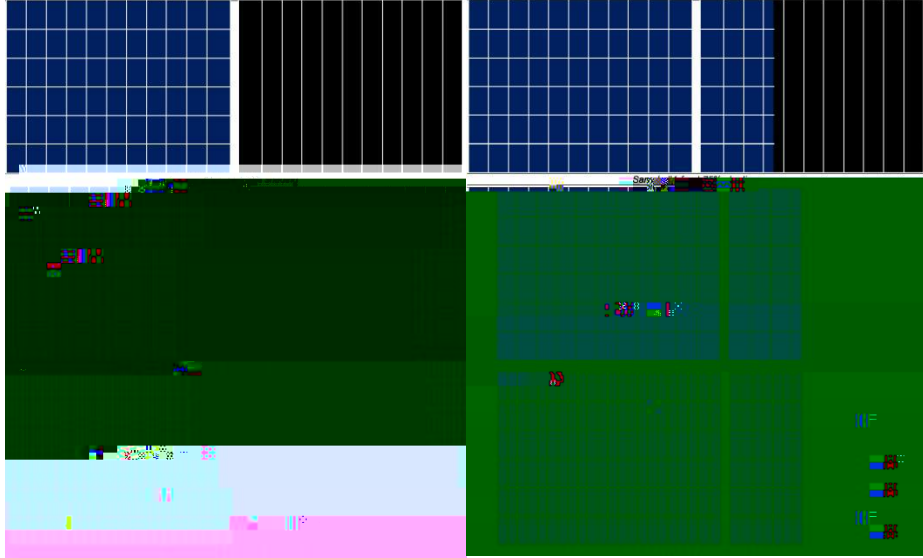

Tiger Neo 3.0

25% 50%

Tiger Neo 3.0

Tiger Neo 3.0

| | Tiger Neo 3.0 | |
|-----|---------------|--|
| | 49.3% | |
| | 48.8% | |
| 25% | 47.8% | |
| 50% | 48.2% | |
| | 7.2% | |

BC
 90% Tiger Neo 3.0
 75%
 <50% Tiger Neo 3.0
 >75% Tiger Neo 3.0
 50%-75%
 Tiger Neo 3.0
 Tiger Neo
 Tiger Neo 3.0 HCP MAX FP N TOPCon
 Tiger Neo 3.0 85% ± 5% BC 10-15
 3%-5% -0.26% / 0.35%
 1% 30
 N TOPCon Tiger Neo 3.0

